

## Application:

Applicable place: blister characters, metal characters, billboard, black and white board, light box etc.

Scope of application: 6-12cm thickness sign boards.



## Products feature:

- Lighting source adopt SMD 2835 LED, 9V LED source, 30-33 lm.
- Injection craft, aluminum pcb good for heat dissipation, with good protect effect.
- Approved CE, RoHS certificates, fire rating UL94 V-0 test.

## Installation:

Back PE adhesive tape scheduled, fixed with screw.

Cascade can cut, 1pcs modules can be cut.

## Warranty:

3years or 13000 hours.

## Electric Parameters:

Part No.	Color	CCT(K)	Beam angle	Output (lm/piece)	CRI Ra	Luminous efficacy (lm/W)	Voltage (V DC)	Current (mA)	Power (W/piece)
SMD2160W2	PW	7000-8000	160°	60	≥75	83	12	60	0,72
----	CW	9000-12000	160°	60	≥75	83	12	60	0,72


### Other Parameters:

Standard connection qty (pcs)	Largest qty of cascade for single-ended power supply(pcs)	Largest qty of cascade for double-ended power supply( pcs)	Single-module weight (g)	Working environment temperature (°C)	Storage environment temperature (°C)	IP level
20	50	100	0,007	-25~+60	-25~+70	IP65

### Remark:

- Testing environment temperature is 25±2°C;
- The above data are typical values, the actual data of the product may be different from the typical data. Data is subject to change without prior notice.

### Dimension:

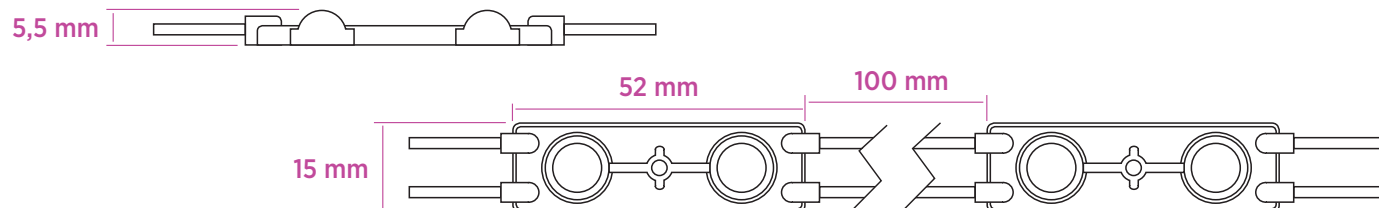

### Light Distribution Curve:

