




4,5 mm

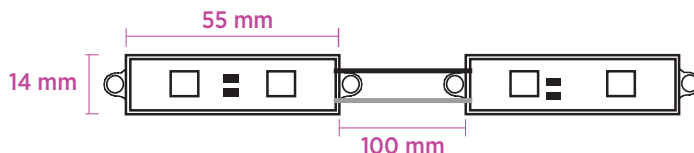

- 2 pcs of LEDs
- *-Color:R-red, Y-yellow,WW-warm white, PW-pure white, CW-cool white, G-green, B-blue
- Rated wattage per LED:0.5W

- Waterproof
- 5050 package power SMD
- PVC housing

Features:

- 2 pcs 5050 SMD LEDs each module,with wide viewing angle
- Super thin,only 4.55mm thickness
- High brightness,especially suitable for big LOGO
- Input voltage: 12V DC.

- Each strip is not more than 30pcs if series connection is adopted
- Easy installation,3M adhesive tape on the back of PVC shell
- Waterproof index: **IP67**

Application:

- Outdoor channel letters,plane letters
- Outdoor plane lamp houses
- Outdoor advertising signs

- Outdoor architectural decoration light source
- Big backlighting panels
- Other lighting projects

Parameters:

Color	Voltage (V)	Current (mA)	Wattage (W)	Color Temperature (K)	View Angle	Luminous Flux (lm)		LED Qty
						min	max	
White	DC 12V	40	0,48	6000-7000	120°	30	36	2
Red	DC 12V	40	0,48	625	120°	12	14	2
Yellow	DC 12V	40	0,48	590	120°	11	13	2
Green	DC 12V	40	0,48	525	120°	18	21	2
Blue	DC 12V	40	0,48	470	120°	6	9	2