



Neón Flex 360°

13 mm

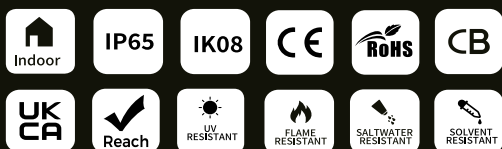

Features:

- Light source: High luminous efficiency, LM80 test proved.
- Process & Material: high light transmittance, high purity silica gel material, IP65 protection level.
- Optical Design: unique optical light distribution structure design, 360° light output uniformly without shadows.
- Appearance Design: skin-friendly surface treatment, comfortable touch, good flexibility, and simple shape.
- Product Certification: CE, ROHS, UCKA, CA.
- Environmental Features: Resistance to saline solutions, acids & alkali, corrosive gases and UV.
- Working/Storage Temperature: Ta:-25-55°C / 0°C-60°C.
- Application:3-dimensional space styling, Indoor decorative lighting.
- 3 years warranty or working life =36000H,whichever comes first.




Basic Parameters:

Referencia	Color	Voltios	Wattios x metro	Medidas mm.	Metros x rollo	Máximo de carga/m	Distancia de corte/cm	Material	Lum. x metro
NF36013B27	2700 K	DC 24 V	8,6 W	5000 x Ø 13	5	5	2,5	Silicona	670
NF36013B40	4000 K								

Note:

- The above data is the testing result of 1M standard product;
- The lumens of output data can be vary up to ±10%;
- The above parameters are all typical values.

Light Distribution:

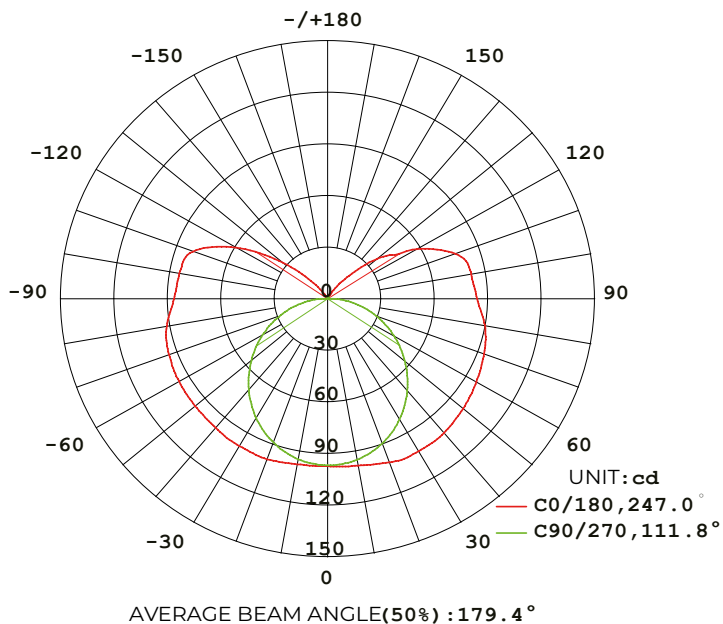

Light distribution

Note: The above data is based on 24V monochrome 4000K color temperature. If you need other models of IES files, please download the corresponding models from the IES database.


Flux out: 4415 l m

Height	Eavg, Em ax	Angle: 175.0 0°	Diameter
1m	0.1714, 97.43 lx		4580.75c m
2m	0.0428, 24.36 lx		9161.50c m
3m	0.0190, 10.83 lx		13742.26 cm
4m	0.0107, 6.08 lx		18323.01 cm
5m	0.0069, 3.89 lx		22903.76 cm
6m	0.0048, 2.70 lx		27484.51c m
7m	0.0035, 1.98 lx		32065.26 cm
8m	0.0027, 1.52 lx		36646.01 cm
9m	0.0021, 1.20 lx		41226.77c m
10m	0.0017, 0.97 lx		5807.52c m

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Effective average illuminance

Product Mechanical Parameters:

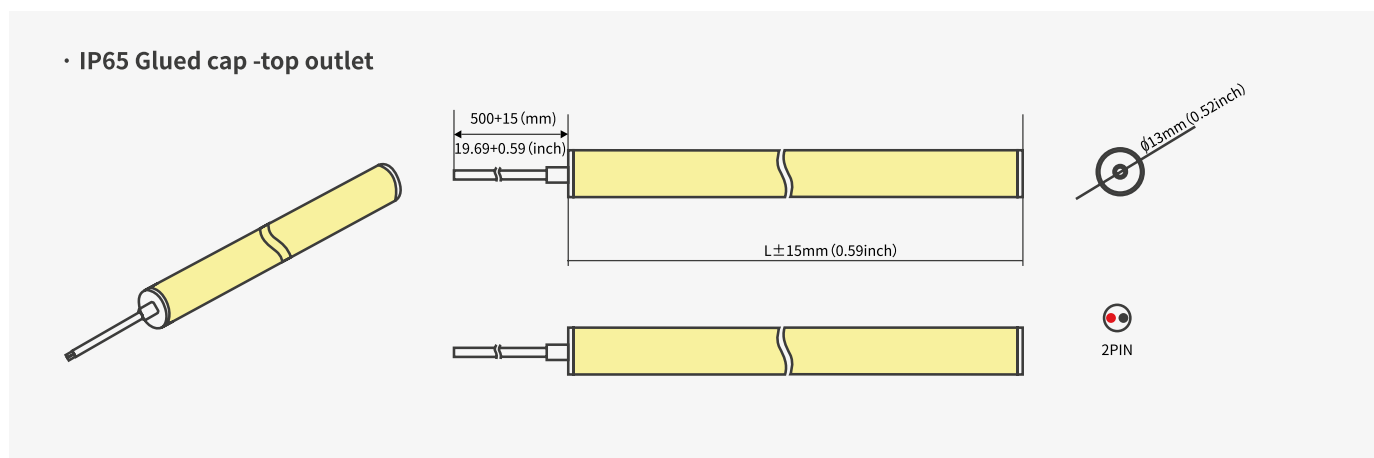

Reliability test:


Test Item	Classification	Reference	Test method or condition
Safety test	Mechanical strength	IEC 60598-1; IEC 60598-2-21	The hammer spring Impact energy 0.35J
	IP	IEC 60598-1; IEC 60598-2-21	IP65
	Winding Test	IEC 60598-1; IEC 60598-2-21	φ150mm cylinder, 60N pull, winding 10 times at (-25°C ±2°C), and 10 times after(-15°C±2°C, 16h).
	Cold Bend Test	IEC 60598-1; IEC 60598-2-21	wound on mandrel, low-temperature (-15°C±2°C, 16h), around the mandrel for two turns
	Cold Impact test	IEC 60598-1; IEC 60598-2-21	Low-temperature (-15°C±5°C, 16h), hammer falls from a height of 100mm.
	Insulation Resistance	IEC 60598-1; IEC 60598-2-21	≤ 2MΩ
	Electrical strength	IEC 60598-1; IEC 60598-2-21	500V
Mechanical reliability testing	Bending test	Colors	Each 200mm, bending up and down 100 times
	Bending test	Colors	Each 200mm, bending left and right 100 times
	Torsion test	Colors	Twist clockwise 5 times and then release, repeat 200 times
	Disassembly and assembly test	Colors	Repeat disassembly and assembly, 10 times
Environment Reliability testing	High temperature storing test	IEC 60068-2-2	80°C, 168h
	Low temperature storing test	IEC 60068-2-1	-40°C, 168h
	High temperature and Humidity impact	IEC 60068-2-78	60°C, 85%RH
	Salt Spray test	IEC 60068-2-11	5% salt solution concentration, 24h
	IK	IEC 62262	5 times of impact on each exposed surface
	Lifetime aging test	Colors	35°C, 6000h
	switch test	Colors	10s On, 10s Off, 10000 times

Precautions:


- Use a 24V DC isolated power supply to drive the neon lamp strip and the ripple wave of constant voltage source shall be less than 5%. It is not allowed to use RC voltage reduction or non-isolated power supply to drive the neon lamp strip.
- In actual applications, 20% of the power supply shall be kept (only 80% of the power is used) to guarantee that sufficient voltage is available to drive the product.
- Attention shall be paid to safe operation. After powering on, it is not allowed to touch the AC power supply to avoid an electric shock.
- Attention shall be paid to the positive and negative poles of the wires during installation and whether the power supply conforms to required voltages to avoid damages.
- Avoid scratching, distortion and irregular bending of the product during installation; otherwise it may cause irreparable damage to the product.
- Please do not bend the strip into an arc with a diameter less than 60mm to ensure the longevity and reliability, the bending diameter too small will damage the product itself.
- If the actual length of application exceeds the specified using length, it will lead to overload heating and uneven brightness.
- To keep the eyes from being harmed, try to avoid staring at the glowing side of the LED strip for a long time.
- Non-professionals are prohibited from installing, disassembling and repairing the product.
- Do not use any acid or alkaline adhesive to fix products (including not limited to glass cement, etc.)
- Product is not suitable for use in swimming pools and fountains.
- Please confirmed before usage as products of varied sizes show slight differences in their color under same color temperature due to their structural differences.
- Colored products are prohibited from cutting to avoid damage to the lamp body caused by improper operation.



It is forbidden to wrap objects less than 120mm

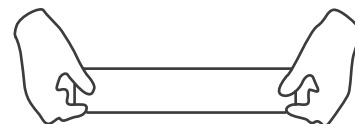

NO stretching



No trampling