


Dimension:



Feature:

- Top light view
- 100% Pure Silicon material
- Top Lighting design,the light output very consistant
- High IP glass. Waterproof:IP 67
- Energy saving. Environment friendly
- Size: 16*16mm, 5M/Reel.

Parameter of Product:

Referencia	Color	Voltios	Wattios x metro	Medidas mm. An. x Al.	LEDs x metro	Lúmenes x metro	Metros x rollo	Máximo de carga/m	Distancia de corte/mm	Material
NFDF24BC	BLANCO 3000	DC 24 V	12 W	16 x 16	120	500	5	5	50 mm	Silicona
NFDF24B	BLANCO 10000									


Absolute maximum ratings (1 meter):

Parameter	Symbol	Value	Unit
Forward current	If	1000 500	mA
Reverse voltage	Vr	5	V
Operating temperature range	Top	-30 -+50	°C
Storage temperature range	Tstg	0-+60	°C
Pulse forward current	Ifp	400	mA
Electrostatic discharge	ESD	2000(HBM)	V


Attention:

1. Do not bend strip light at any direction. Please follow instruction as beow when installation.

Right packing

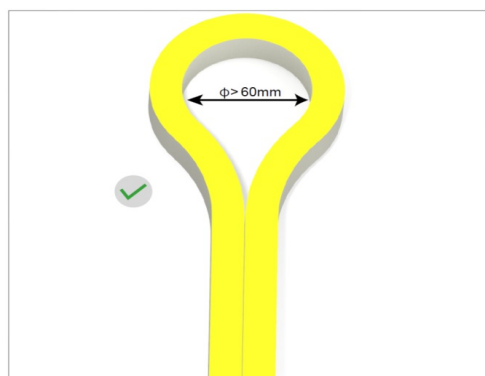

When lighting direction on top,The vertical bending diameter need to more than 60mm.

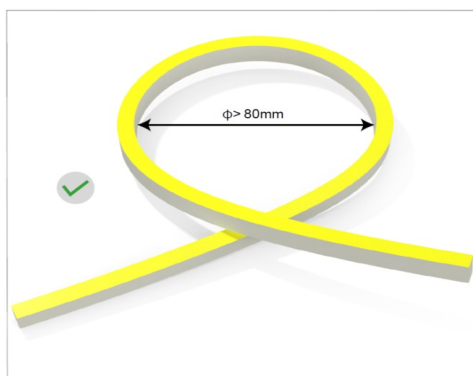

When lighting direction on top,the horizontal bending diameter need to more than 80mm.



Do not twist the strip as picture. It will damage the PCB.

2. This product adopts low-voltage DC power supply. It must be used after AC-DC switching power supply for voltage conversion. It is strictly forbidden to connect the product directly with AC mains voltage, otherwise it will deduct the product and may cause safety accident.