



FEATURES:

- Adopt high efficacy 2835 LED
- Cut-To-Fit: Systems are adaptable to any size installation and can accommodate obstacles and shapes.
- Easy Mounting: 3M double sided tape & screw holes make fast and easy installation without special tools.
- Constant Current Engineered: DC24V Input, constant current, more connection with consistent light output.
- Quick Connector XH-2Y & Multiple Connection spot: Pin type assemblies are easy and stable way to connect panels.
- IP22(non-waterproof) & IP64(spray glue coated) available.

APPLICATION:

Light box, luminous letter, signage, general lighting, steps, roads, bridges, yards etc.

SPECIFICATION:

Referencia	Color	Voltios	Wattios	Flujo luminoso	Ángulo de luz	Nº LED	Chip	Mínimo cortable	Medidas mm
36PF120	BLANCO 6500	DC 24 V	26 W	3421 lm	120°	288	SMD 2835	101,6 x 50,8 mm	609,6 x 304,8

Note:

The above table is the data of non-waterproof version, the waterproof one is 0.95 times of this data.

1. The above data is typical values. The actual data of each single product may differ from the typical values. The data is subject to change


without notice.

2. The beam angle is tested with single color on.


3. Different color temperature will make luminous flux different.

4. Power and luminous flux tolerance within±10%.


PROFILE DRAWINGS:

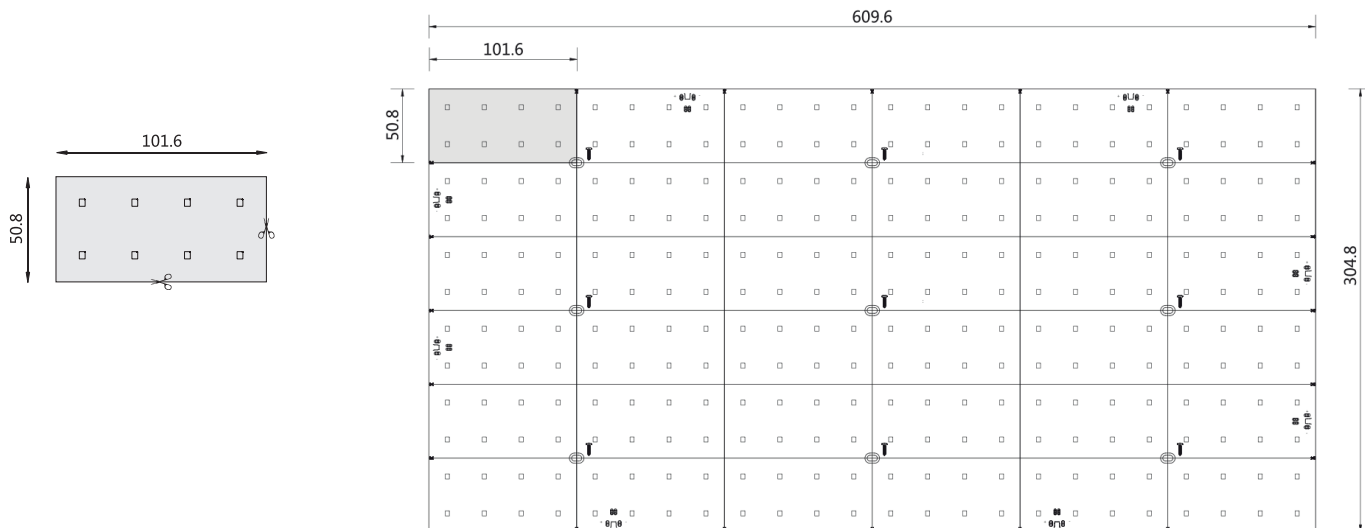

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM:

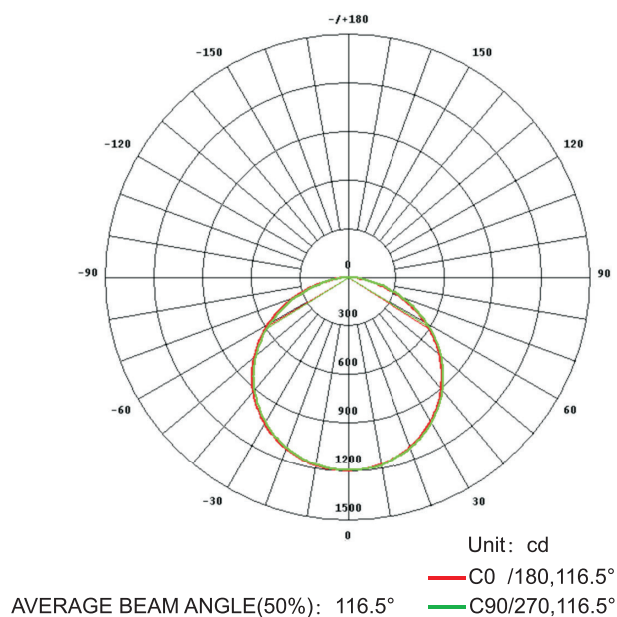

AVERAGE ILLUMINATION:

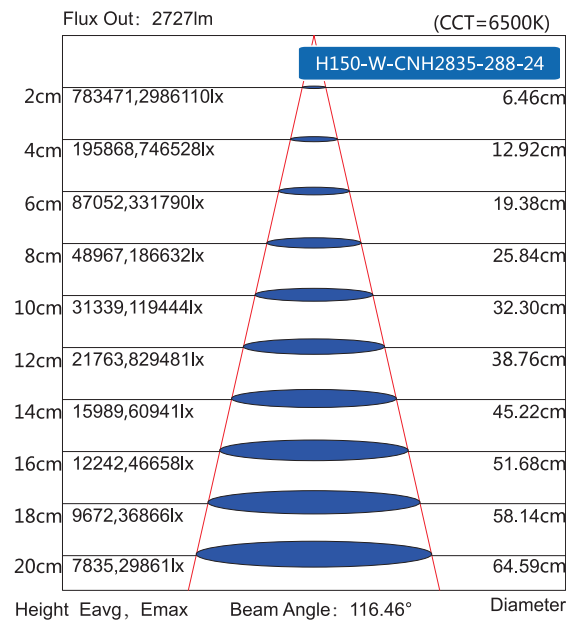

Note: the above two figure are tested with sample H150-W-H2835-288-24 at 6500K.