


Application:

Apply to 8-40 cm depth double-sided light box or 6-20 cm depth single-sided light box signs at airports, metros, banks, buildings and shopping malls, etc.

Features:

- Constant power drive, more stable performance.
- Utilize superior quality LED, high brightness, wide beaming angle and high luminous efficiency.
- Specially designed optical lens of 8°*15° with further emitting distance.
- With lifespan of more than 50000hrs, and no light degradation under certain conditions.
- Constant voltage driving method, safe and stable.
- CE, RoHS certified

Beaming Angle:

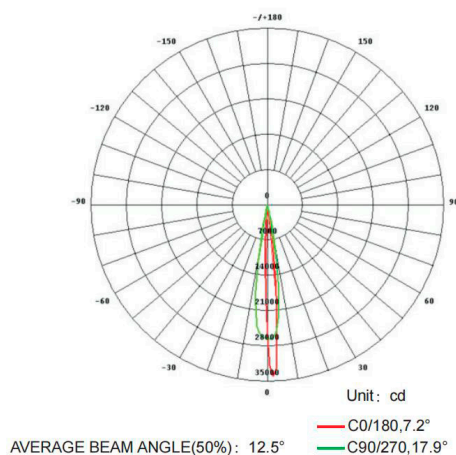

Parameters:

Items	Parameters	Parameters	Parameters
Part Number	LR3132435	LR6262435	LR9402435
CCT (K)	6000-6500	6000-6500	6000-6500
Beaming Angle(°)	8*15	8*15	8*15
CRI (Ra)	≥70	≥70	≥70
Luminous Flux(lm)	2100	4200	6300
Voltage(V)	24	24	24
Power(W)	21	42	63
LED Qty(pcs)	6	12	18
Dimension(mm)	313*25*15	626*25*15	940*25*15
Weight(g)	53.6	107.2	160.8
Drive Method	Constant power	Constant power	Constant power
Working Tem.(°C)	-25~+60	-25~+60	-25~+60
Storage Tem.(°C)	-25~+70	-25~+70	-25~+70
Protection Grade	IP33	IP33	IP33

Reference Scheme:

Size: L*W(mm)	Depth (mm)	Layout	Distance (mm)	umination(lux)
3000*2500 1	20 2	.5-meter sides lighting 5	2.2	1600-1900